


## RDC104-4

DC sensitive residual current monitoring module  
for electric vehicle charging systems



# RDC104-4

## DC sensitive residual current monitoring module for electric vehicle charging systems

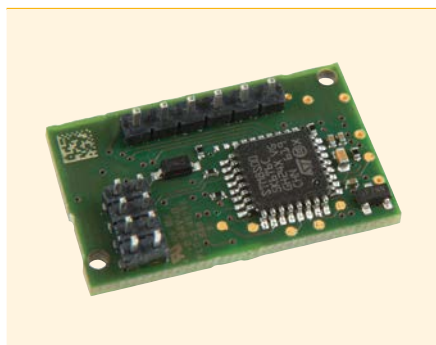

RDC104-4

### Device features

- Three outputs (DC1, DC2, Error)
- Measuring range DC  $\pm 300$  mA
- Residual current resolution 0.2 mA
- Patented measurement technology
- Load current up to 48 A r.m.s. (single-phase) or 3 x 32 A r.m.s. (three-phase)
- Fault output (integrated self monitoring and test functions)
- High insensitivity to external interferences
- Wide range of use even in severe environments (e.g. in the event of external magnetic fields)
- As a RDC-M module in applications according to DIN EN 61851 or IEC 62955, the RDC104-4 can replace a type B RCD when combined with a type A RCD and a suitable switching device (e.g. a power relay).

### Approvals



### Product description

The residual current monitoring module RDC104-4 is used **in combination** with a **measuring current transformer** CTBC17 or W15BS and a **type A RCD** which has to be provided in the installation for DC fault current monitoring of AC charging systems for electric vehicles in which AC or DC fault currents can occur.

The rated voltage  $U_n$  is 250 V and the rated current (charging current)  $I_n = 1 \times 48$  A/3 x 32 A. The RDC104-4 is suitable for integration into a charging unit Mode 3 (AC) as a RDC-M module according to IEC 62955.

**The RDC104-4 is only intended for purchase by the manufacturer of the charging system and not for end users!**

### Function

The residual current evaluation unit consists of an externally connected measuring current transformer CTBC17 or W15BS for measuring and the RDC104-4 for evaluating the residual currents. The RDC104-4 determines the DC component of the residual current.

The RDC104-4 signals a limit value violation at the outputs DC1 and DC2. The limit values depend on the variant and, in connection with the type A RCD, meet the respective normative shutdown requirements in accordance with IEC 62955.

**Charging process:** Before each charging process, the charge controller must check that the RDC104-4 functions correctly. The charging process must be disabled. Regular testing increases the safety of the charging process and prevents long-term drift of the residual current measurement by means of an internal offset measurement.

**Measuring current transformer:** The measuring current transformers CTBC17 or W15BS are magnetically shielded, so that no external interference can affect the residual current measurement.

### Standards

The device RDC104-4 series complies with the following device standards:

- **IEC 62955** (Residual direct current detecting device (RDC-DD) to be used for mode 3 charging of electric vehicles)
- **IEC 60364-7-722** (Low-voltage electrical installations – Part 7-722: Requirements for special installations or locations – Supplies for electric vehicles)
- **DIN EN 61851-1** (Electrical equipment of electric road vehicles – Electric vehicle conductive charging system – Part 2-2: AC electric vehicle charging station)


### Patents

EP 2 571 128 / US 9,397,494 / ZL 201210157968.6 / CN 103001175, EP 2 813 856


### Ordering information

Description	Diameter/ Connection cable	Type	Art. No.
RDC-M module acc. to IEC 62955	–	RDC104-4	B94042483
Measuring current transformer	15 mm/1470 $\pm$ 30 mm	W15BS	B98080065
	15 mm/180 $\pm$ 30 mm	W15BS-02	B98080067
	15 mm/325 $\pm$ 25 mm	W15BS-03	B98080068
	17 mm/--	CTBC17	B98080070
Connection cable CTBC17	--/180 $\pm$ 30 mm	CTBC17-Cable180MM	B98080540
	--/325 $\pm$ 25 mm	CTBC17-Cable325MM	B98080541
	--/1470 $\pm$ 30 mm	CTBC17-Cable1470MM	B98080542

Wiring diagram

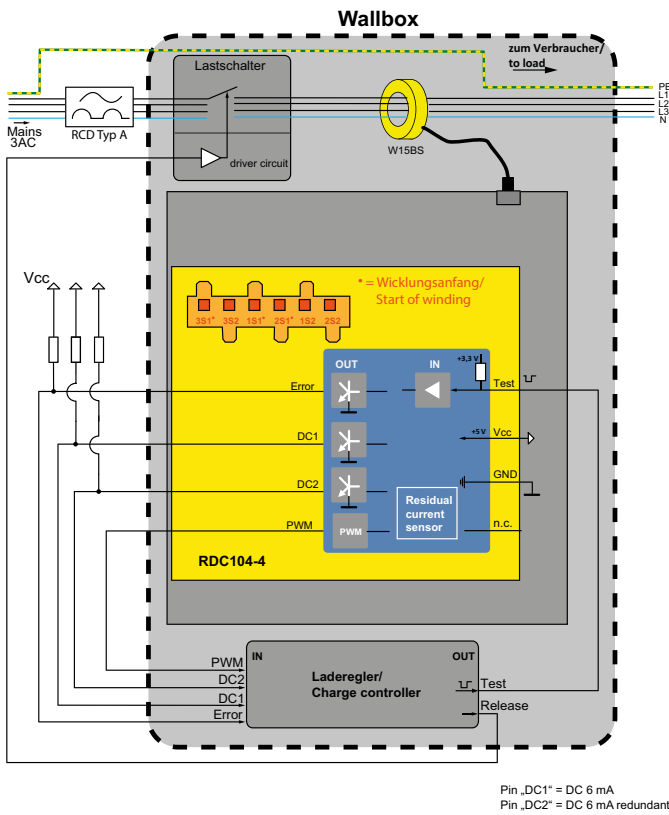


Wiring diagram measuring current transformer of the series W15BS

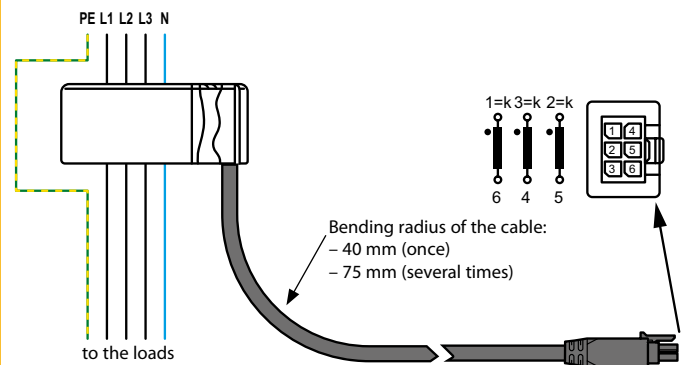


**Caution! Cable break due to excessively bent/mechanically stressed cable!**  
Fasten the cable with remaining length according to bending radius.

Dimension diagram

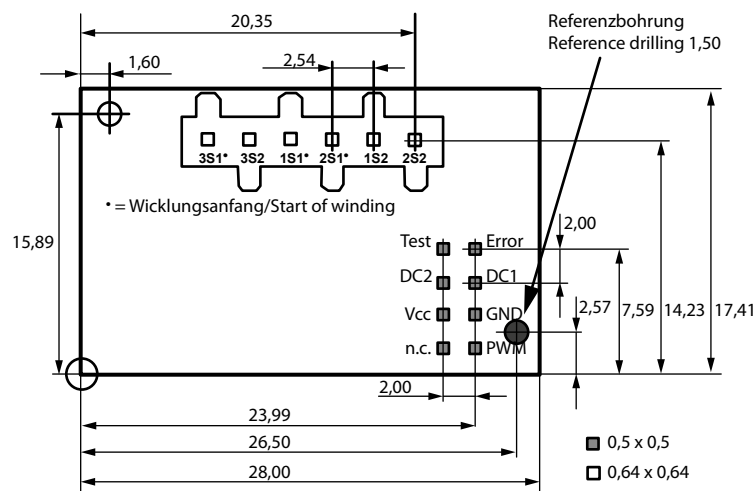


**Connection socket measuring current transformer**

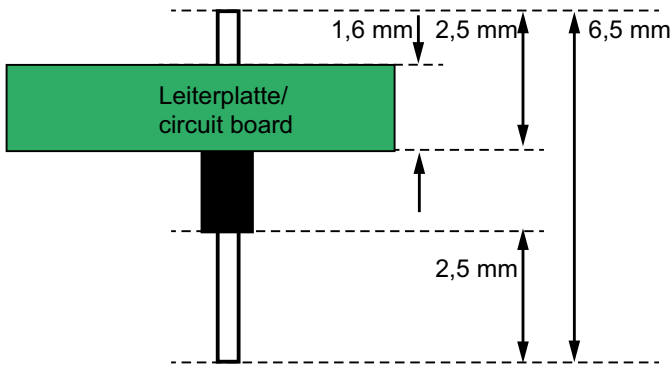


Side view RDC104-4

Recommended drilling diameter:  $\varnothing$  1,1 mm

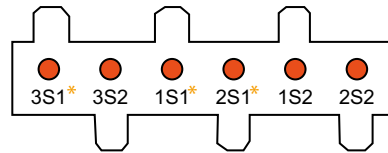


\* = Start of winding



Description	Evaluating board	Socket
Test winding (start of winding)	3S1*	b
Test winding	3S2	e
Measuring winding 2 (start of winding)	1S1*	c
Measuring winding 1 (start of winding)	2S1*	a
Measuring winding 2	1S2	d
Measuring winding 1	2S2	f

**Inputs/outputs**



Recommended drilling diameter pins:  $\varnothing$  0,9 mm

- 1 - Test** **Input test**  
activated by GND for 30 ms...1.2 s
- 2 - Error** **Fault output** (active low)  
LOW: no system fault  
HIGH: system fault
- 3 - DC2** **IEC: current output DC 6 mA** (active low)  
LOW:  $I_{\Delta n2} < DC\ 6\ mA$ , no system fault  
HIGH:  $I_{\Delta n2} \geq DC\ 6\ mA$  and/or system fault
- 4 - DC1** **IEC: current output DC 6 mA** (active low)  
LOW:  $I_{\Delta n2} < DC\ 6\ mA$ , no system fault  
HIGH:  $I_{\Delta n2} \geq DC\ 6\ mA$  and/or system fault
- 5 - Vcc** **+ Vcc**: Voltage supply module +5 V
- 6 - GND** Ground
- 7 - n.c.** Not connected
- 8 - PWM** Output pulse width modulation (f = 8 kHz) 0...100 % = DC 0...30 mA

**Technical data**
**Primary circuit (monitored circuit)**

Rated voltage $U_n$	250 V
Rated current $I_n$	single-phase: 48 A three-phase: 32 A
Short-term continuous current $I_n$ for 1 s	200 A

**Insulation coordination according to IEC 60664-1/IEC 60664-3**

Definitions:	
Measuring circuit IC1	(L1, L2, L3, N)
Electronics IC2	(a...f, Test, Error, DC1, DC2, Vcc, GND, PWM)
Rated voltage	250 V
Overvoltage category (OVC)	III
Rated impulse voltage:	
IC1/IC2	4 kV
Rated insulation voltage:	
IC1/IC2	250 V
Pollution degree	2
Protective separation (reinforced insulation) between:	
IC/IC2	OVC III, 250 V
The data are valid from the monitored primary circuit to the output circuit.	

**Power supply**

Nominal supply voltage $V_{cc}$	DC 5 V
Tolerance of the supply voltage $V_{cc}$	$\pm 5\%$
Voltage ripple $V_{cc}$	$< 100$ mV
Absolute maximum supply voltage $V_{cc}$	DC 5,5 V
Supply current $I_{cc}$	45 mA

**Residual current measuring range**

Measuring range $I_{\Delta n}$	DC $\pm 300$ mA
Resolution $I_{\Delta n}$	DC 0.2 mA

**Response values**
**RDC104-4 (IEC 62955)**

Rated DC residual operating current $I_{\Delta dc}$	6 mA
Response value $I_{\Delta n2}$	DC 6 mA
Response tolerance $I_{\Delta n2}$	50...100 %
Restart value $I_{\Delta n2}$	$< 3$ mA
Operating time $t_{ae}$	
DC 6 mA	$< 480$ ms
DC 12 mA	$< 240$ ms
DC 30 mA	$< 120$ ms
DC 60 mA	$< 70$ ms
DC 200 mA	$< 30$ ms
DC 300 mA	$< 30$ ms

**Outputs DC1, DC2, Error**

Type	Open Collector (NPN)
Switching capacity	DC 40 V/20 mA
Signalling times in the event of module and hardware errors	
Error	$\leq 1.5$ s
DC1	$\leq 2.5$ s
DC2	$\leq 2.5$ s

**Measurement output (PWM)**

Type	PushPull
HIGH level	3.1...3.5 V
LOW level	0...0.5 V
PWM frequency	8 kHz
Scaling	0...100 % = DC 0...30 mA
Maximum current-carrying ability	10 mA

**Control input (TEST)**

Type	LOW: activated state HIGH: deactivated state
Switching thresholds	HIGH: 3.1... 5.5 V LOW: 0... 0.6 V

**EMV (DIN EN 61851-1, DIN EN 61851)**

**ESD restrictions:** The RDC104-4 must be mounted in an enclosure that complies with the mentioned standards.

**Restrictions line-conducted interferences:** The supply conductor must fulfil the requirements of the voltage supply (see manual)

ESD immunity acc. to Human Body Model JESD22-A114	$\pm 2$ kV (air) $\pm 2$ kV (contact)
Operating temperature	$-30 \dots 80$ °C
Storage temperature	$-40 \dots 85$ °C

**Climatic class**

Stationary use (IEC 60721-3-3) (except condensation, water and formation of ice)	3K24
Transport (IEC 60721-3-2)	2K11
Long-term storage (IEC 60721-3-1)	1K21

**Classification of mechanical conditions**

Stationary use (IEC 60721-3-3)	3M11
Transport (IEC 60721-3-2)	2M4
Long-term storage (IEC 60721-3-1)	1M12
Range of use	$< 4000$ m

**Degree of protection**

RDC-104-4	IP00
Measuring current transformer (without connector plug)	IP55

**Connections**
**Measuring current transformer**

Connection type	PCB plug-in connector 0.65 x 0.65 mm
Modular dimensions	single row 6 x 2.54 mm
Contact surface	tinned
Pin length	2.5 mm

**Inputs/outputs**


Connection type	PCB plug-in connector 0.5 x 0.5 mm
Arrangement of connections	double row 2 x 4 pins
Modular dimensions	2.00 mm
Contact surface	tinned
Pin length	2.5 mm
Soldering process for PCB	recommended: selective soldering

**Connection measuring current transformer CTBC17 or W15BS**

Maximum distance RDC104-4 to connector	100 mm
Connection type	PCB plug-in connector
Number of poles	6 (2x3 poles)
Modular dimensions	3.0 mm
Number of mating cycles	30
Manufacturer type designation	Molex MicroFit 3.0 Header
Article number	43045-0607

The connector is not included in the scope of delivery. For further information, refer to the original data sheet created by Molex.


**„Test“ timing diagram**

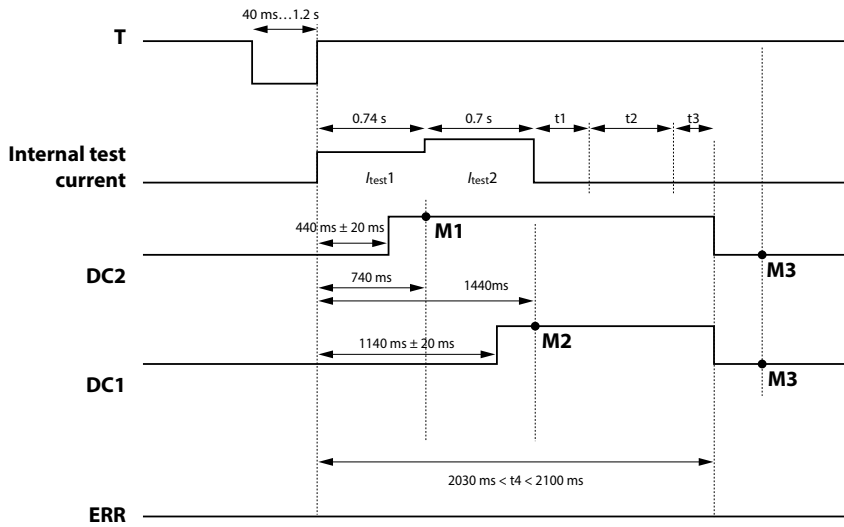

- M1:** DC1 = HIGH
- M2:** DC2 = HIGH
- M3:** DC1 / DC 2 = LOW

- t1 = 10 ms or 1000 ms      Optional time to check for welded contacts.  
10 ms if check is disabled.
- t2 = 500 ms                      Time for offset calibration.
- t3 = 0 ms to 50 ms              Optional time required to store the offset calibration value.  
Depends on the difference to the value already stored in memory.

**Timing-Diagramm „Alarm“**

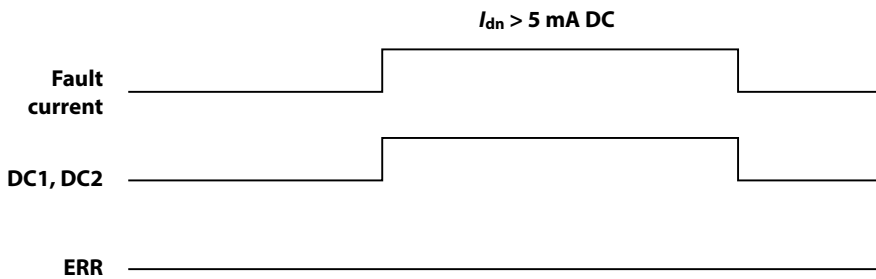

**Bender GmbH & Co. KG**  
 Londorfer Straße 65 • 35305 Grünberg • Germany  
 Tel.: +49 6401 807-0 • info@bender.de • www.bender.de



**BENDER Group**